

Touch&Steam



118

Touch&Steam


model	space volume (cubic metres)	power (kW)
30	0 - 3,5	3
45	3,5 - 4,5	4,5
60	4,5 - 6,2	6
90	6,2 - 9,2	9

121

Touch&Steam

(quote request form)

Technical information

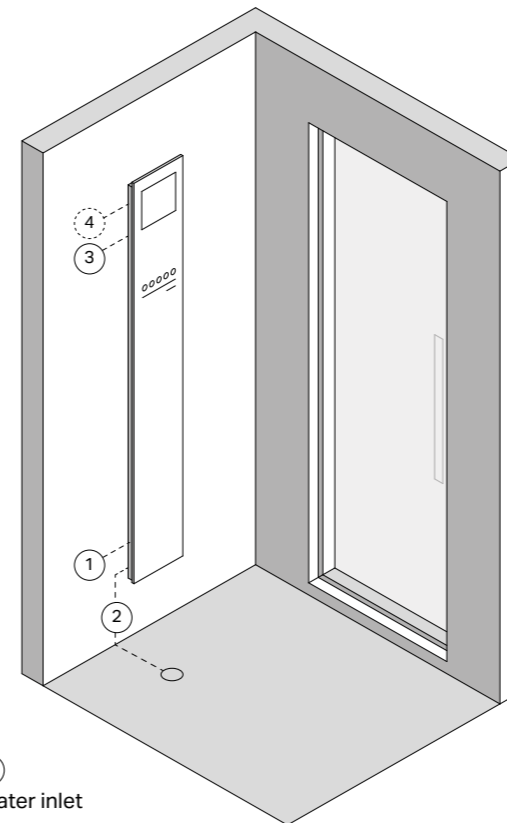[More information: www.effe.it](http://www.effe.it)


- ① Water inlet
- ② Water outlet
- ③ Electric power supply
- ④ Options connection

All work must be carried out by qualified personnel or by one of our Service Centres, based on local and international standards – CEI 64.8 (IEC 364 – 1). Make sure that the electric and plumbing connections for the steam generator have been correctly set up (water line with closing gate valve, outlet siphon, power line with suitable magnetothermal residual current device, etc.) according to the related technical specifications. Connect all piping in such a way that it may be disconnected (in the event of removal of the generator for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.

Create a space of 400mm x 1740 mm, for installation of the Touch&Steam device.

- ① Water inlet: set up the piping mounted flush with the casing with a 1/2" female thread. Hook up only cold water (max 25°C). Inlet water pressure must not exceed 8 bar (800 kPa). For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200 kPa).
CAUTION: if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.

- ② Water outlet: set up 1/2" female, heat resistant (up to 100°C) siphoned piping mounted flush with the casing. The outlet pipe must ensure correct water outflow, therefore, a downward slope of at least 5° is recommended.


- ③ Sheath Ø 25 for the electric power supply: set up a power cable of suitable cross-section.

- ④ Sheath Ø 25 for connecting the options.

DESIGN PLUS



TOUCH&STEAM

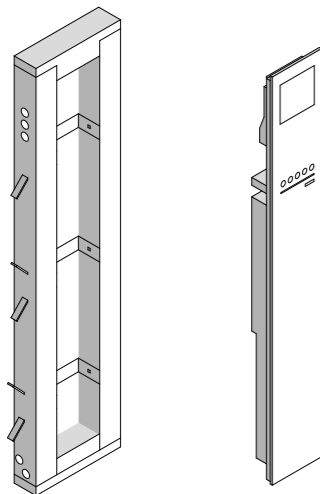

DIMENSIONS

cm 23 x 3,7 x 165 h

COUNTERBOX DIMENSIONS

cm 40 x 10 x 173 h
with Schlüter waterproofing mat

MATERIALS

Screen-printed tempered glass panel
Painted aluminium RAL 9003

BUILT IN STEAM GENERATOR

Features:

- › automatic boiler cleaning system
- › water flow rate control system
- › automatic water drainage system
- › Automatic energy-saving function

TOUCH-SCREEN CONTROL PANEL

with backlit icons and temperature gauge

POWER STEAM FUNCTION

Steam diffusion and forced ventilation heating system

PRE-HEATING FUNCTION

Unit pre-heating function with forced ventilation heating system

CONTAINERS FOR ESSENTIAL OILS

LIGHTING SYSTEM WITH LED RGB COLOUR THERAPY

5 fixed colours, 4 dynamic cycles and white light

ECC - EFFE COMFORT CONTROL

This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app Effe experience to your tablet or smartphone.

[More information](#)

ESS - EFFE SOUND SYSTEM

You can listen to your favourite music inside the Hammam using a Bluetooth connection and your own device. The speakers are built into the Touch & Steam.

[More information](#)

TOUCH&STEAM 30

Space volume (cubic metres): 0 - 3,5
Power: 3,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 4,4 Kg/h max

Counterbox	CH 90 00 0110
Touch&Steam 30	HA CM TS 0016
Total Price	

[Technical card download](#)

TOUCH&STEAM 45

Space volume (cubic metres): 3,5 - 4,5
Power: 4,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 6,6 Kg/h max

Counterbox	CH 90 00 0110
Touch&Steam 45	HA CM TS 0017
Total Price	

[Technical card download](#)

TOUCH&STEAM 60

Space volume (cubic metres): 4,5 - 6,2
Power: 6,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 8,9 Kg/h max

Counterbox	CH 90 00 0110
Touch&Steam 60	HA CM TS 0018
Total Price	

[Technical card download](#)

TOUCH&STEAM 90


Space volume (cubic metres): 6,2 - 9,2
Power: 9,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 13,1 Kg/h max

Counterbox	CH 90 00 0110
Touch&Steam 90	HA CM TS 0022
Total Price	

[Technical card download](#)

Options


NOTE: TOUCH&STEAM SUPPORTS A MAXIMUM OF 1 LIGHT FIXTURE, TO BE SELECTED FROM EITHER RGB COLOUR THERAPY FIXTURES OR WHITE LED FIXTURES.

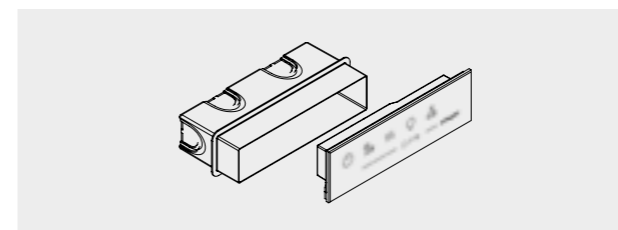

Remote touch-screen control panel

Control panel dimensions: cm 16,5 x 5
Mounting box dimensions: cm 16 x 7 x 4,5 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0172
Remote touch-screen control panel	ME 60 00 0033
Total Price	

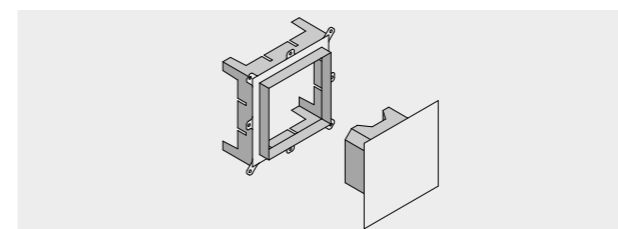

White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class

Counterbox	CH 90 00 0174
White light fixture	HA 70 00 0009
Total Price	

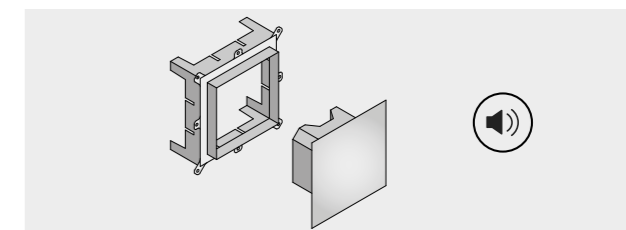

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
[More information](#)

Counterbox	CH 90 00 0174
Colour therapy and loudspeakers	HA 70 10 0005
Total Price	