

# Aquasteam Smart



124

## Aquasteam Smart


model	space volume (cubic metres)	power (kW)
30	0 - 3,5	3
45	3,5 - 4,5	4,5

127

## Aquasteam Smart (quote request form)

# Technical information

More information: [www.effe.it](http://www.effe.it)

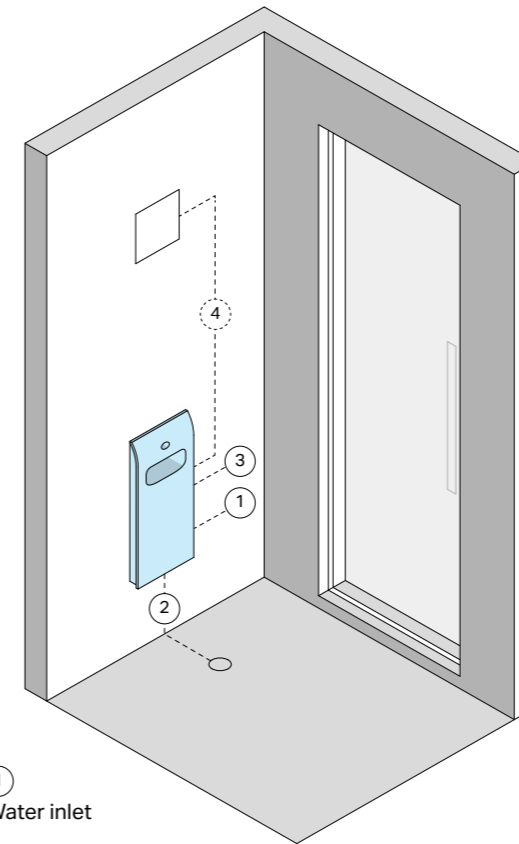

- ① Water inlet
- ② Water outlet
- ③ Electric power supply
- ④ Options connection

All work must be carried out by qualified personnel or by one of our Service Centres, based on local and international standards – CEI 64.8 (IEC 364 – 1). Make sure that the electric and plumbing connections for the steam generator have been correctly set up (water line with closing gate valve, outlet siphon, power line with suitable magnetothermal residual current device, etc.) according to the related technical specifications. Connect all piping in such a way that it may be disconnected (in the event of removal of the generator for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.  
A space of 380 mm x 545 mm and at least 78 mm deep must be available to house the Aquasteam Smart device;

- ① Water inlet: set up the piping mounted flush with the casing with a 1/2" female thread. Hook up only cold water (max 25°C). Inlet water pressure must not exceed 8 bar (800 kPa). For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200 kPa).


**CAUTION:** if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.

- ② Water outlet: set up 1/2" female, heat resistant (up to 100°C) siphoned piping mounted flush with the casing. The outlet pipe must ensure correct water outflow, therefore, a downward slope of at least 5° is recommended.

- ③ Sheath Ø 25 for the electric power supply: set up a power cable of suitable cross-section.

- ④ Sheath Ø 25 for connecting the options.

# AQUASTEAM SMART

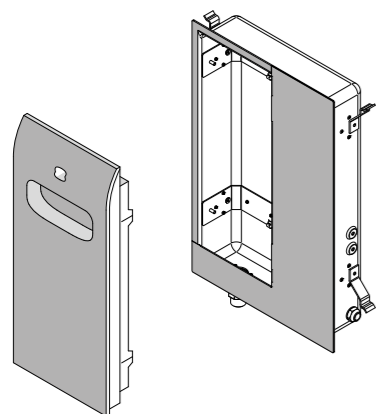

## DIMENSIONS

cm 25 x 3,7 x 57 h

## COUNTERBOX DIMENSIONS

cm 42 x 11 x 64 h  
with Schlüter waterproofing mat

## MATERIALS

Curved silk-screen printed glass panel  
Painted aluminium RAL 9003

## BUILT IN STEAM GENERATOR

features:

- › automatic boiler cleaning system
- › water flow rate control system
- › automatic water drainage system
- › Automatic energy-saving function

## TOUCH-SCREEN CONTROL PANEL

with backlit icons and temperature gauge

## WATERFALL SPRING

with controlled backlit water flow  
Bowl in white resin

## CONTAINERS FOR ESSENTIAL OILS

## ECC - EFFE COMFORT CONTROL

This system is incorporated into steam generator so that the Turkish bath can be remotely controlled. Just download the app Effe Experience to your Tablet or Smartphone.

[More information](#)



### AQUASTEAM SMART 30

Space volume (cubic metres): 0 - 3,5  
Power: 3,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz  
Steam generation: 4,4 Kg/h max

Counterbox	CH 90 00 0198
------------	---------------

Aquasteam Smart 30	HA CM AS 0009
--------------------	---------------

Total Price	
-------------	--

[Technical card download](#)

### AQUASTEAM SMART 45

Space volume (cubic metres): 3,5 - 4,5  
Power: 4,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz  
Steam generation: 6,6 Kg/h max

Counterbox	CH 90 00 0198
------------	---------------


Aquasteam Smart 45	HA CM AS 0010
--------------------	---------------

Total Price	
-------------	--

[Technical card download](#)

# Options

NOTE: AQUASTEAM SMART CAN POWER ONLY 1 OPTIONAL CEILING LIGHT FITTING OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT OPTIONS

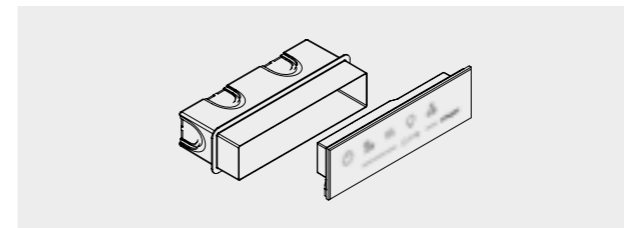


## Remote touch-screen control panel

Control panel dimensions: cm 16,5 x 5  
Mounting box dimensions: cm 16 x 7 x 4,5 h  
with Schlüter waterproofing mat

Counterbox	CH 90 00 0172
------------	---------------

Remote touch-screen control panel	ME 60 00 0033
-----------------------------------	---------------

Total Price	
-------------	--

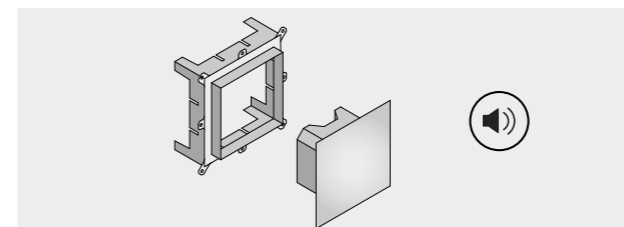

## Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2  
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h  
with Schlüter waterproofing mat  
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm  
[More information](#)

Counterbox	CH 90 00 0174
------------	---------------

Colour therapy and loudspeakers	HA 70 10 0005
---------------------------------	---------------


Total Price	
-------------	--



## Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems.

Cod. ME 99 00 0334
--------------------

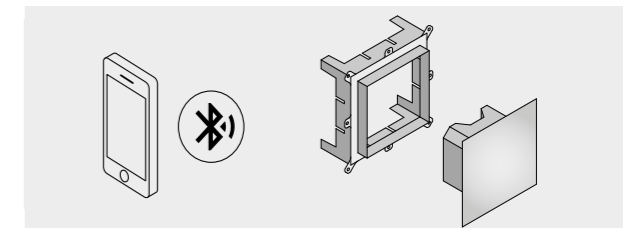

## ESS - Effe Sound System


### Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2  
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h  
with Schlüter waterproofing mat  
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm  
[More information](#)

Counterbox	CH 90 00 0174
------------	---------------

ESS kit with ceiling light fitting	HA 70 10 0008
------------------------------------	---------------

Total Price	
-------------	--

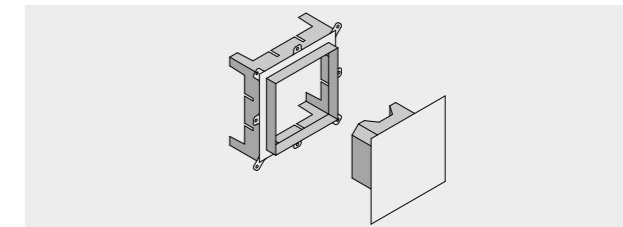

## White light fixture

Light fixture dimensions: cm 20 x 20 x 2  
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h  
with Schlüter waterproofing mat  
IP X5 class

Counterbox	CH 90 00 0174
------------	---------------

White light fixture	HA 70 00 0009
---------------------	---------------

Total Price	
-------------	--